
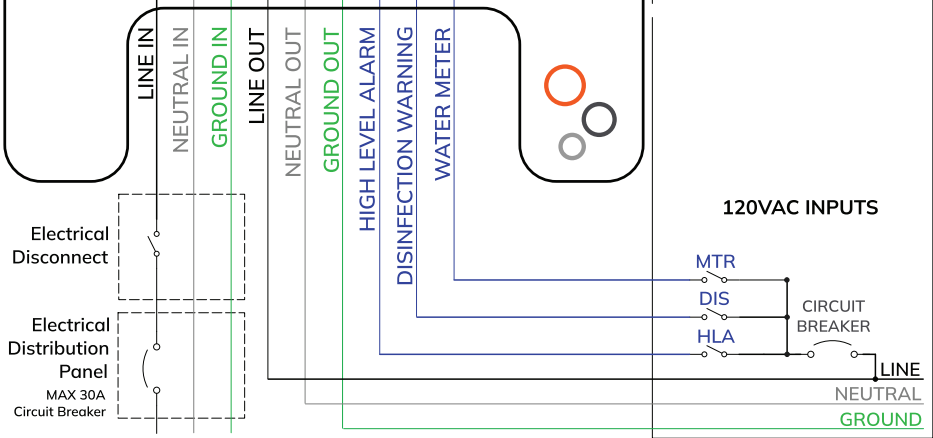
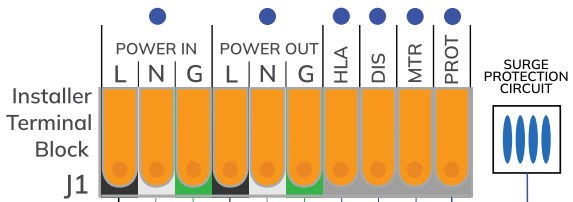


SL-4



External Overcurrent Protection and Electrical Disconnection are required.

DANGER

To reduce the risk of electric shock, disconnect power to unit before opening the cover.

DANGER

Pour réduire le risque d'une décharge électrique, débrancher avant d'ouvrir le couvercle.

Intertek
5031152

CONFORMS TO
UL STD 61010-1
CERTIFIED TO
CSA STD C22.2#61010-1

MODEL: SL-4

RATING: 120 VAC 30AMPS 1PH 60Hz

ENCLOSURE TYPE: 1; 3R; 4; 12

MAX ALTITUDE: 3000 METERS

HUMIDITY: 85% RH @ 50°C NON-CONDENSING

SUPPORT

septilink.com/support