
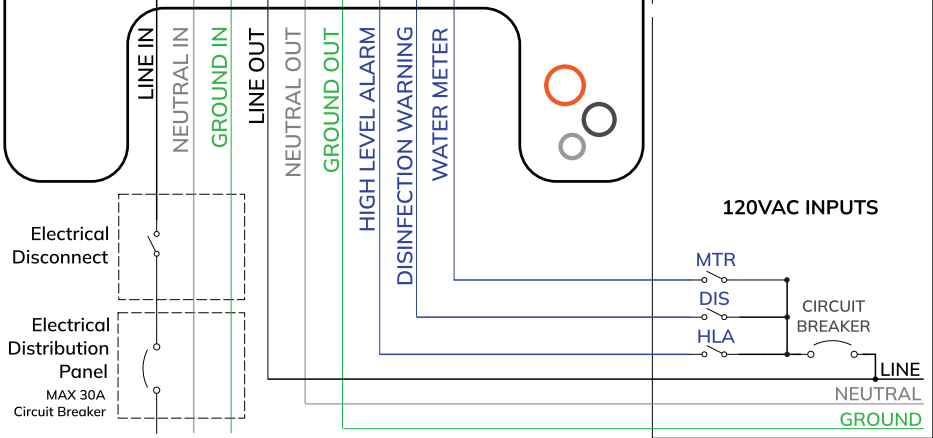

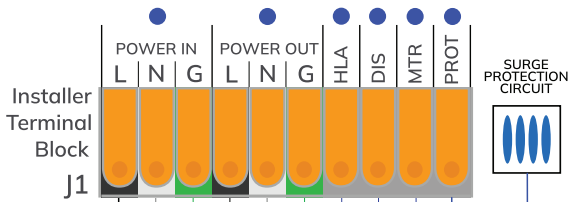


SL-5



External Overcurrent Protection and Electrical Disconnection are required.

DANGER

To reduce the risk of electric shock, disconnect power to unit before opening the cover.

DANGER

Pour réduire le risque d'une décharge électrique, débrancher avant d'ouvrir le couvercle.

CONFORMS TO
UL STD 61010-1
CERTIFIED TO
CSA STD C22.2#61010-1

MODEL: SL-5
RATING: 120 VAC 30 AMPS 1PH 60Hz
ENCLOSURE TYPE: 1; 3R; 4; 4X; 12
MAX ALTITUDE: 3000 METERS
HUMIDITY: 85% RH @ 50°C NON-CONDENSING

SUPPORT

septilink.com/support